

FASCIA

BULLNOSE 138mm x 18mm



BULLNOSE 180mm x 18mm



BULLNOSE 180mm x 25mm



BOARDS


DAR - D4SRC depth - 18mm



DAR - D4SQ depth - 30mm x 11mm




DAR - D4SRC depth - 25mm




DAR - D4SQ depth - 42mm x 11mm




DAR - D4SRC depth - 30mm




DAR - D4SQ depth - 66mm x 11mm



DAR - D4SRC depth - 42mm

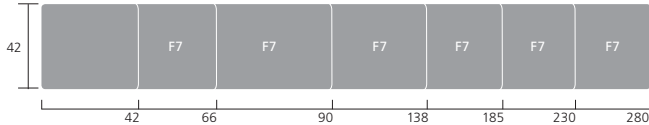

DAR - D4SQ depth - 90mm x 11mm



HAND RAILS & BOTTOM RAILS

BOTTOM RAIL
BR2

65mm x 30mm



BOTTOM RAIL
BR16

88mm x 42mm



BOTTOM RAIL

88mm x 30mm



HAND RAIL
HR1 DR

63mm x 65mm



HAND RAIL
HR5

88mm x 42mm



HAND RAIL
HR6 DR

88mm x 42mm



HAND RAIL
HR8 DR

79mm x 63mm



DOOR JAMBS

SINGLE 138mm x 30mm



DOUBLE 163mm x 30mm



LINING

TGV PATTERN 302 138mm x 11.5mm



TGV PATTERN 321 138mm x 11mm



TGV REBATED PATTERN 412 138mm x 18mm



TGV 90mm x 18mm




BEAMS

GL8 140mm x 65mm



GL8 180mm x 65mm



GL8 240mm x 65mm




GL8 290mm x 65mm




POSTS

GL8 2mm Round Corners 63mm x 63mm




GL8 2mm Round Corners 88mm x 63mm



GL8 2mm Round Corners 88mm x 88mm




GL8 2mm Round Corners 112mm x 112mm



GL8 2mm Round Corners 135mm x 135mm



GL8 2mm Round Corners 185mm x 185mm



CLADDING

CHAMFER 166mm x 18mm



WEATHERBOARD CLASSIC REBATED BEVELBACK 138mm x 18mm



WEATHERBOARD CLASSIC REBATED BEVELBACK 185mm x 18mm



WEATHERBOARD RUSTICATED 185mm x 18mm



WEATHERBOARD RUSTICATED 138mm x 18mm



MOULDINGS

QUAD 18mm



SCOTIA 30mm x 30mm



EXTERNAL CORNER MOULD 42mm x 42mm



QUAD 23mm



Why choose Jenkin Tru-Pine?

- ✓ Strong and durable
- ✓ H3 Hazard Class protection
- ✓ Pre-primed
- ✓ Defect free
- ✓ Strict quality control
- ✓ Proven history
- ✓ Plantation pine

Premium quality timber ideal for above ground, outdoor use, structurally graded, smooth, dressed finish for easy painting. Available in an extensive range of sizes. The perfect finish for your outdoor living.



POSTS, BEAMS
& CLADDING



HAND RAILS, BALUSTRADES,
POSTS & BOARDS



USAGE

Jenkin Tru-Pine is a premium exterior treated timber for above ground use only. Ensure a timber clearance of 100mm above paved surfaces or 175mm above finished ground level is maintained.

TREATMENT

Jenkin Tru-Pine achieves a H3 Hazard Class protection rating through treatment with an advanced organic treatment using LOSP (Light Organic Solvent Preservative) that protects against fungal decay and insect attack.

FIXINGS

Use hot-dip galvanised nails, screws, bolts and brackets in general locations. For coastal conditions subject to sea spray use stainless steel.

SEALING

During the installation process all exposed unprimed surfaces resulting from cut ends, mitres, notching, boring, punched nail holes or similar should be resealed with a suitable acrylic or oil-based premium exterior timber primer.

PAINTING SPECIFICATION

1. Spot prime and putty all nail holes.
2. Ensure primed surfaces are clean and free from contaminants such as dust, grease or mildew.
3. Apply a minimum of two full coats of premium acrylic exterior house paint to recommended film thickness

For a better finish and extended paint durability we recommend the application of one full coat of premium quality OIL BASED primer undercoat.

Use colours that have a Light Reflective Value (LRV) of 45 to 100 (100 being pure white). Colours with a LRV of 44 to 0 (0 being pure black) progressively generate extreme surface heat when exposed to direct sunlight and can cause resin bleed, shrinkage, distortion and cracking. It will also reduce the service life of the paint coatings.

STORAGE

Store the product in a dry environment away from damp ground until use. Kiln-dried Radiata Pine timber is hygroscopic and will absorb moisture in a damp environment and release it in a dry environment. If timber absorbs moisture, some dimensional swelling will occur.

HEALTH & SAFETY

Jenkin Tru-Pine treated products are safe to handle using normal timber handling precautions.

TECHNICAL DATA & INSTALLATION GUIDE

Please refer to the Building Code of Australia guidelines or your local building authority/council to ensure correct construction practices are followed.

Jenkin Tru-Pine meets Service Class 3/AS5068 standards for structural products.

Visit www.jenkin.co.nz for technical specifications, product information guides, span tables, application guides and warranties.

Jenkin
Tru-Pine

